



# Electrolux

## Modular Cooking Range Line 700XP 4 Hot Plate Electric Induction Cooking Top Range

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_


SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

700XP 4 Hot Plate Electric Induction Cooking Top Range  
Modular Cooking Range Line

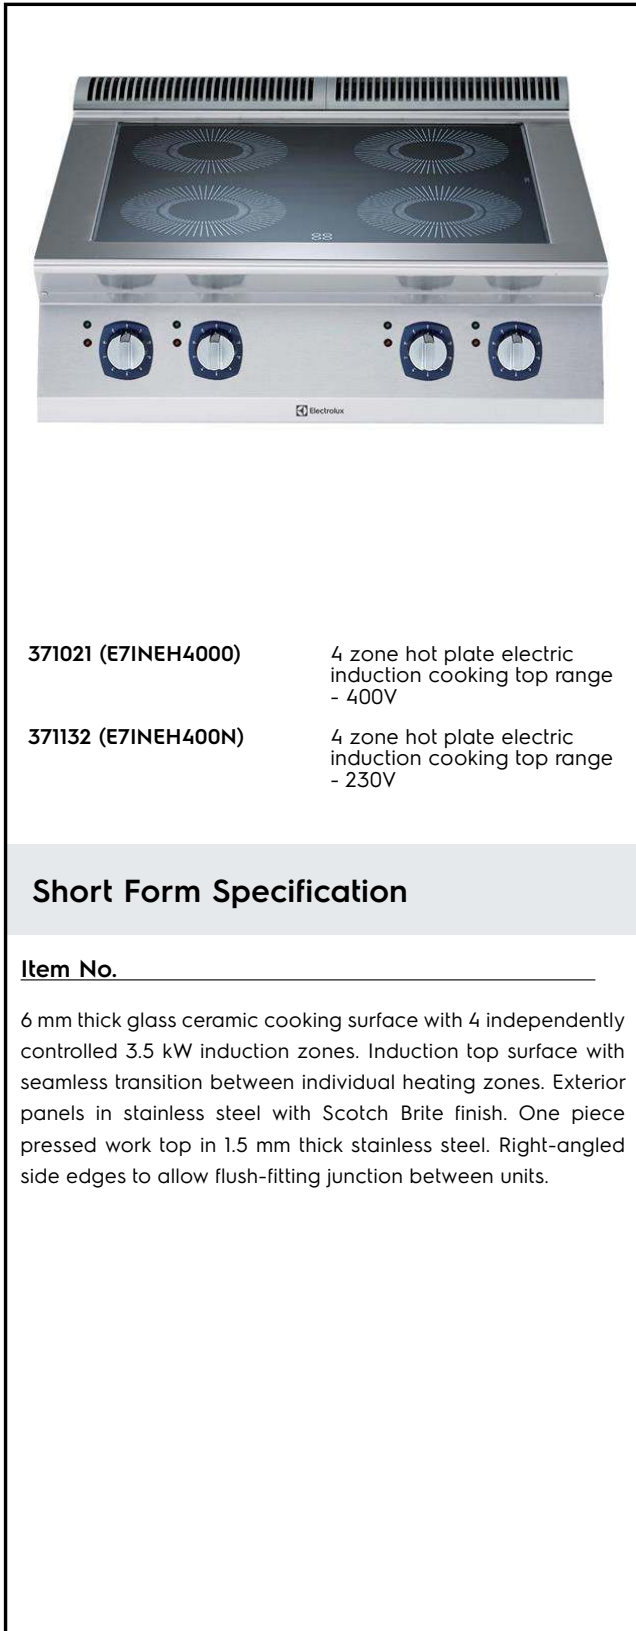

371021 (E7INEH4000)

4 zone hot plate electric induction cooking top range - 400V

371132 (E7INEH400N)

4 zone hot plate electric induction cooking top range - 230V

### Short Form Specification

#### Item No.

6 mm thick glass ceramic cooking surface with 4 independently controlled 3.5 kW induction zones. Induction top surface with seamless transition between individual heating zones. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- 6mm glass ceramic cooking surface with 4 independently controlled induction zones with a power of 3.5 kW per zone.
- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Indicating lamp for each zone located on control console.
- Induction plates endowed with overheating safety device.
- Power to the individual zones can be set with progressive output i.e. fine regulation at the lower and larger progress at the upper levels.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- IPX 4 water protection.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.

### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

### Optional Accessories

- Support for bridge type installation, 800mm PNC 206137
- Support for bridge type installation, 1000mm PNC 206138
- Support for bridge type installation, 1200mm PNC 206139
- Support for bridge type installation, 1400mm PNC 206140
- Support for bridge type installation, 1600mm PNC 206141
- Water column with swivel arm (water column extension not included) PNC 206289
- Water column extension for 700 line PNC 206291
- Chimney upstand, 800mm PNC 206304
- Chimney grid net, 400mm (700XP/900) PNC 206400
- 2 side covering panels for top appliances PNC 216277

APPROVAL: \_\_\_\_\_



Experience the Excellence  
[www.professional.electrolux.com](http://www.professional.electrolux.com)



**Electrolux**

**Modular Cooking Range Line  
700XP 4 Hot Plate Electric  
Induction Cooking Top Range**


- Stainless steel universal frying pan with stainless steel handle (diam. 200mm) suitable for induction and all other heating sources PNC 653596
- Universal frying pan with stainless steel handle (diam. 240mm) suitable for induction and all other heating sources PNC 653597
- Universal frying pan with stainless steel handle (diam. 280mm) suitable for induction and all other heating sources PNC 653598



**Modular Cooking Range Line  
700XP 4 Hot Plate Electric Induction Cooking Top Range**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2019.05.20

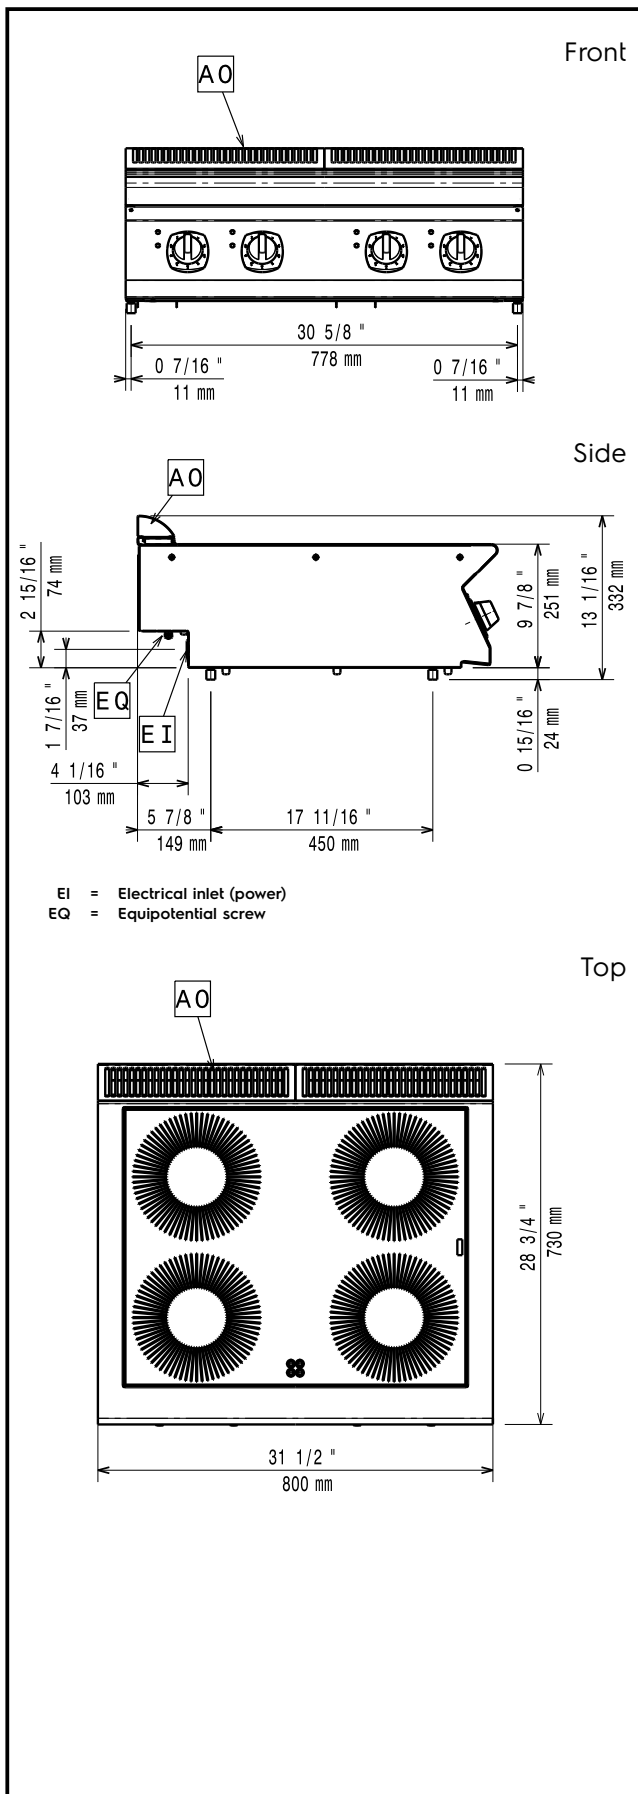

## Electric

### Supply voltage:

371021 (E7INEH4000)	380-415/3 ph/50/60 Hz
371132 (E7INEH400N)	230 V/3 ph/50/60 Hz

### Total Watts:

14 kW

### Predisposed for:

371021 (E7INEH4000)	380-415V 3~ 50/60Hz
	14kW

## Key Information:

### Induction Top Dimensions

(width): 800 mm

### Induction Top Dimensions

(depth): 730 mm

External dimensions, Width: 800 mm

External dimensions, Height: 250 mm

External dimensions, Depth: 730 mm

Net weight: 57 kg

### Shipping weight:

371021 (E7INEH4000)	67 kg
371132 (E7INEH400N)	69 kg

### Shipping height:

371021 (E7INEH4000)	530 mm
371132 (E7INEH400N)	520 mm

### Shipping width:

820 mm

### Shipping depth:

860 mm

### Shipping volume:

0.37 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Induction compatible pots & pans must be used.