



# Electrolux

## Digital Undercounter Benefit-Line Refrigerated Counter 2 Doors - Stainless Steel

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_


SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Benefit-Line Refrigerated Counter 2 Doors - Stainless Steel  
Digital Undercounter

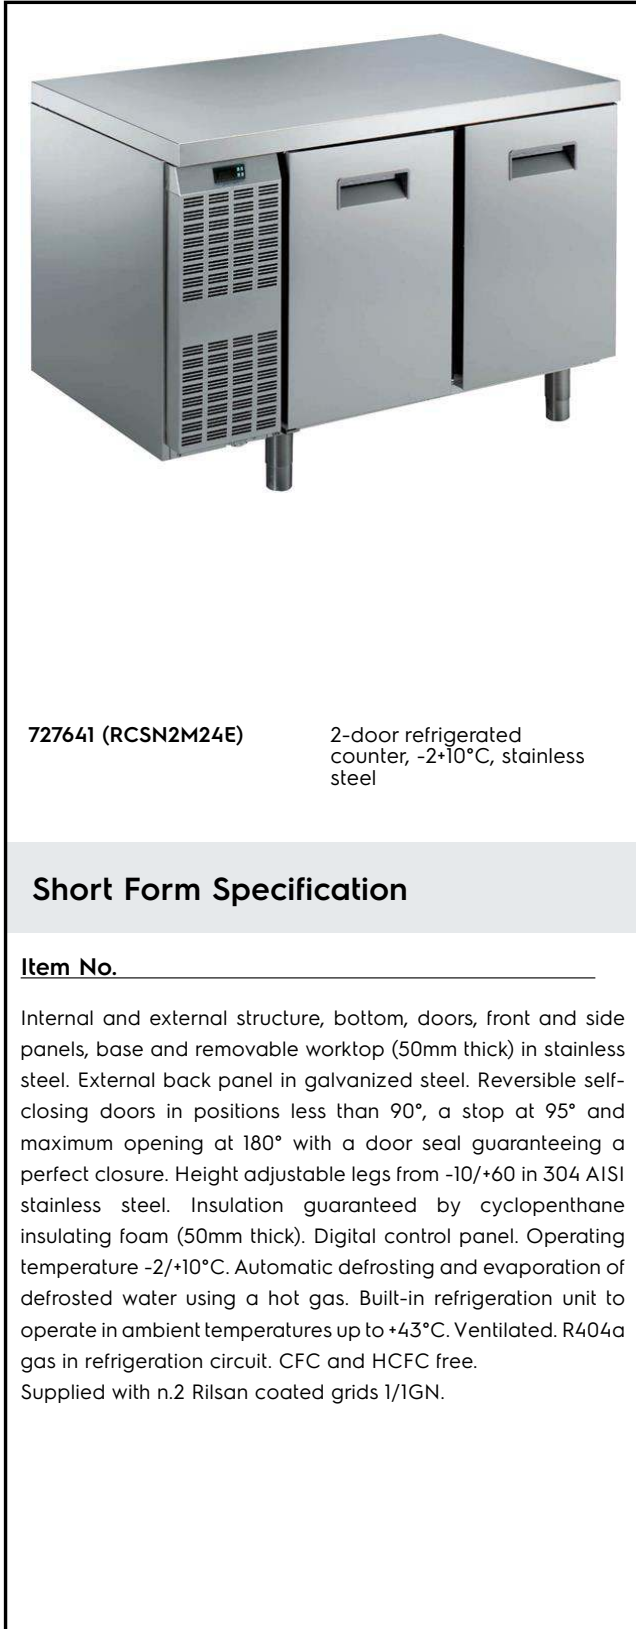

727641 (RCSN2M24E)

2-door refrigerated counter, -2/+10°C, stainless steel

### Short Form Specification

Item No. \_\_\_\_\_

Internal and external structure, bottom, doors, front and side panels, base and removable worktop (50mm thick) in stainless steel. External back panel in galvanized steel. Reversible self-closing doors in positions less than 90°, a stop at 95° and maximum opening at 180° with a door seal guaranteeing a perfect closure. Height adjustable legs from -10/+60 in 304 AISI stainless steel. Insulation guaranteed by cyclopentane insulating foam (50mm thick). Digital control panel. Operating temperature -2/+10°C. Automatic defrosting and evaporation of defrosted water using a hot gas. Built-in refrigeration unit to operate in ambient temperatures up to +43°C. Ventilated. R404a gas in refrigeration circuit. CFC and HCFC free. Supplied with n.2 Rilsan coated grids 1/1GN.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

### Construction

- External back panel in galvanized steel.
- Refrigerant type: R404a.
- Built-in compressor to suit operating conditions.
- CFC and HCFC free.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.
- Internal and external structure, bottom, doors, front and side panels, base and 50mm thick removable worktop in stainless steel.

APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.professional.electrolux.com](http://www.professional.electrolux.com)

**Included Accessories**

- 2 of 1/1GN grey rilsan grid PNC 881435

**Optional Accessories**

- 2 half drawers kit for Benefit line counters PNC 880023
- Lock kit for Benefit line counters PNC 880024
- Wheels kit PNC 880025
- Reversibility door kit PNC 880046
- Internal structure to support 3 grids (right and left) PNC 880047
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139
- Stainless steel internal structure to support 6 grids (right and left) PNC 880140
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Kit 4 feet for Benefit and Concept refrigerated counters PNC 880334
- Kit reversible door for standard benefit counters PNC 880341

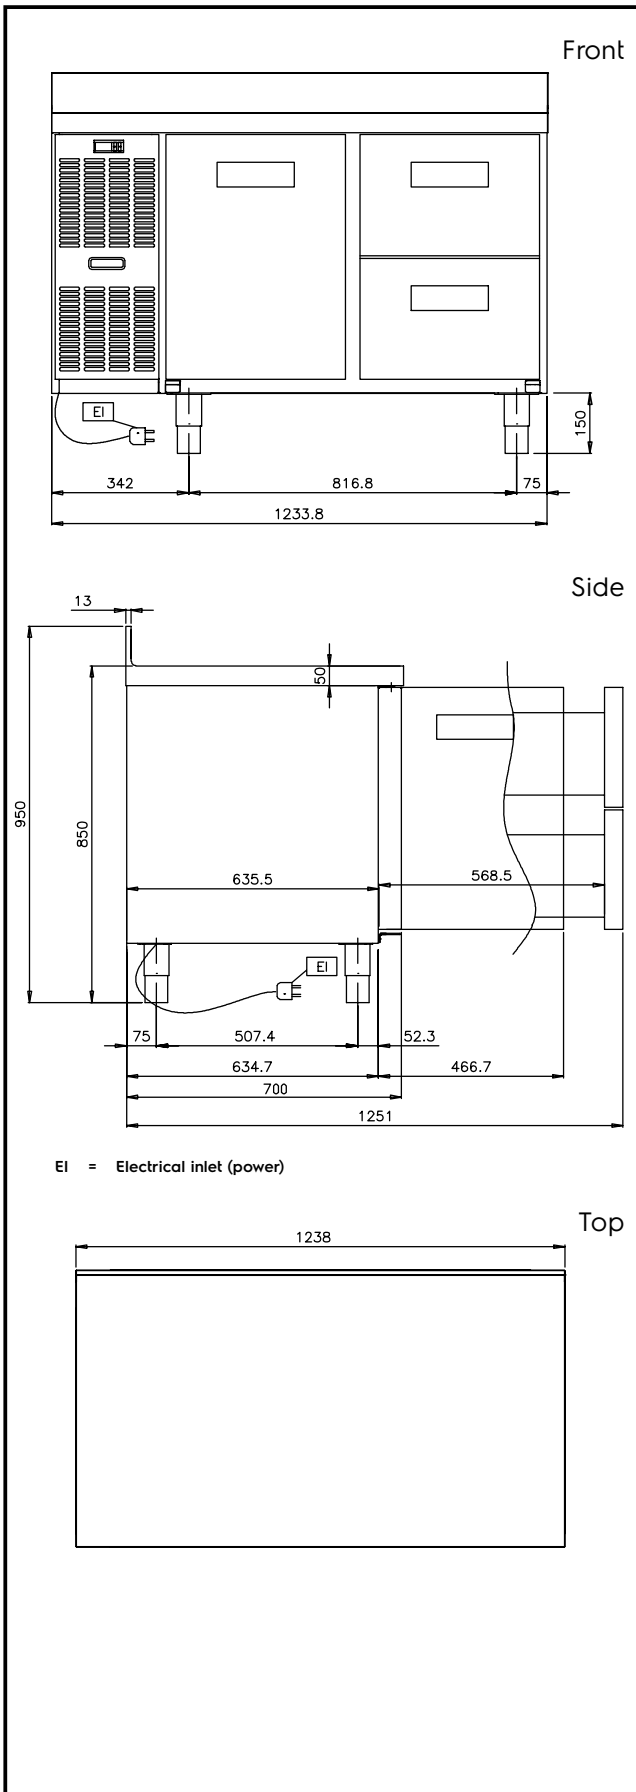

## Electric

Supply voltage:	727641 (RCSN2M24E)	230 V/1 ph/50 Hz
Electrical power max.:		0.27 kW

## Key Information:


Gross capacity:	265 lt
Net Volume:	165 lt
Door hinges:	
External dimensions, Width:	1238 mm
External dimensions, Height:	850 mm
External dimensions, Depth:	700 mm
External dimensions, Depth with Doors Open:	1102 mm
Net weight:	115 kg
Noise level:	55 dBA
Approvals:	CB;CE
Worktop type:	Stainless Steel
<b>Built-in Compressor and Refrigeration Unit</b>	

## Refrigeration Data

Compressor power:	1/3 hp
Refrigerant type:	R404A
Refrigeration power:	448 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	130 g
Min/Max internal humidity:	55/
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
N° defrost in 24 hrs:	every 6 hrs

## Product Information (EU Regulation 2015/1094)

Energy Class:	C
Yearly and daily energy consumption:	912kWh/year - 2.2kWh/24h
Climate class:	Normal duty (cl.4)
Energy Efficiency Index (EEI):	41.26

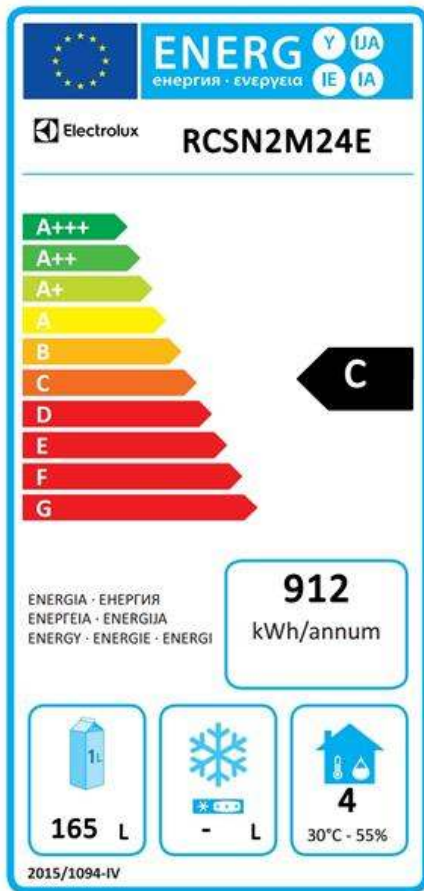

### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

**Important:** all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.